

Reset Password Guide

(CDR-882/780/790/990)




Call Direct
Document version 1.4
Last updated 17 December, 2010

support@call-direct.com.au


Administration Password Reset Guide

1. Click the "**Start**" button on the desktop, then "**Run**" and type in the box "**telnet 192.168.1.50**" next click on the OK button.

Note if the IP address of the unit is not the default (192.168.1.50) please use the correct address instead.

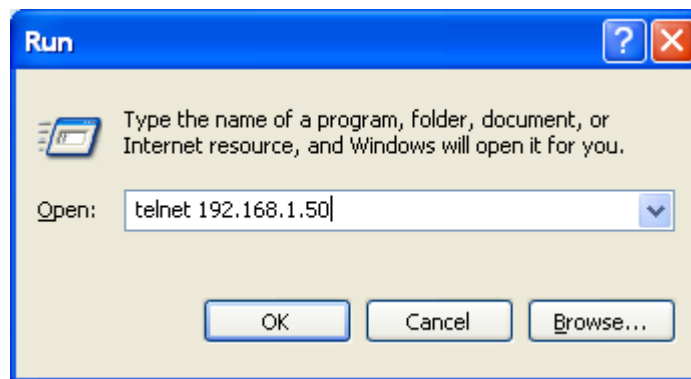

2. A black box will appear with the line "**cdcs login:**" displayed.

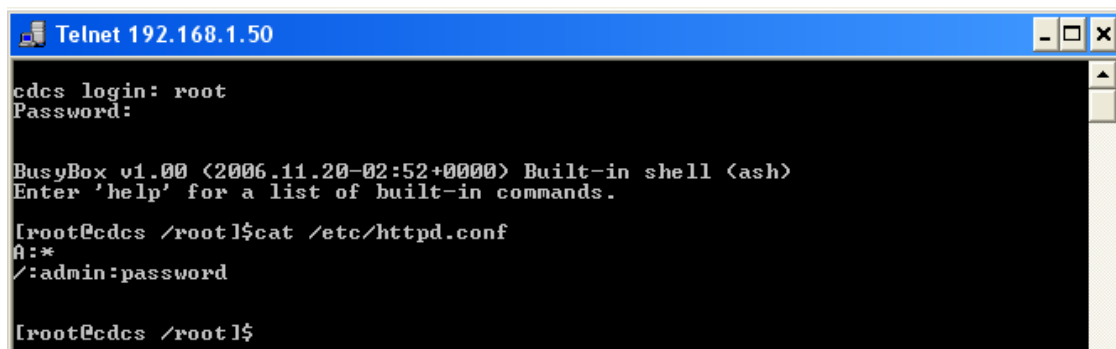

Enter the following credentials: cdcs login: **root** Password: **gronk**

3. Next type in "**cat /etc/httpd.conf**" and press the enter key. This retrieves the current password and displays it on screen.

```
[root@cdcs /root]#cat /etc/httpd.conf  
A: *  
/:admin:password
```

The password shown in the example figure above is **password**.

- Once you have the current password log into the web configuration page by navigating to <http://192.168.1.50> in a web browser. Select the LAN tab on the top left hand side of the page.

Note if the IP address of the unit is not the default (192.168.1.50) please use the correct IP address instead.

The screenshot displays the web configuration interface for a CallDirect Cellular Router. The browser's address bar is highlighted with a red box, showing the URL <http://192.168.1.50/ctrlFile/index.html>. The page title is "CallDirect Cellular Router Setup". On the left, a sidebar menu has the "LAN" tab selected. The main content area is titled "LAN" and contains several configuration sections:

- LAN CONFIGURATION:** Ethernet IP Address is set to 192.168.1.50, and Ethernet Subnet Mask is set to 255.255.255.0.
- DNS MASQUERADE:** The "Enable" radio button is selected.
- PPPOE SETUP:** The "Disable" radio button is selected.
- ADMINISTRATION:** The "Enable" radio button for Remote Administration is selected. The Remote Administration Port is set to 1 (1-65535). There are input fields for Admin Password and Config Password.

"Save" and "Help" buttons are located at the bottom right of the configuration area.

- Next under the Remote Administration section type in the new admin password you wish to use and press the Save button.

| ADMINISTRATION | |
|----------------------------|---|
| Remote Administration | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| Remote Administration Port | <input type="text" value="0"/> (1 - 65534) |
| Admin Password | <input type="password"/> |
| Confirm Password | <input type="password"/> |

Enter new password for the webpage

The password has now been changed.